


DF104-2W Zone 0 • 1 • 2 Atex Flashlight



- 2 LIGHT MODES
- 144M BEAM RANGE
- UP TO 80 HOURS RUNTIME
- REMOVABLE CLIP
- SWITCH PUSH BUTTON ON TAIL



On/Off Tail Switch



Removable clip


125 55 LUMENS | 144|90M METRE SPOT BEAM | 42.5 | 80HRS RUN TIME | IP67 | GAS ZONES 0+1+2

IEC | IECEx | CLASSIFIED UL us | RoHS | Ex | CE | IC-CELL+ Powered by 3x

Key features:

- Intrinsically safe LED flashlight for use in Zone 0 • 1 • 2 hazardous areas
- 2 Light modes: High: 125lm | Low: 55lm
- Up to 144 | 90 Metre beam
- High powered LED - CREE XP-E
- Waterproof up to 1m (IPX7)
- ANSI IP67 rating
- Powered by 3x C-Cell batteries
- Switch push button on tail
- Durable impact resistant, Drop proof up to 1m
- Easy to use, maintenance free
- **Applications - Fire and Emergency Services, Utility Companies**

ATEX Certification:
EX ia IIC T4 Ga

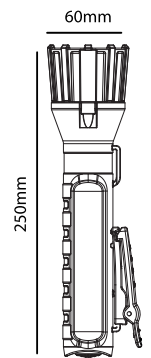

PRODUCT CODE
DF104-2W

